

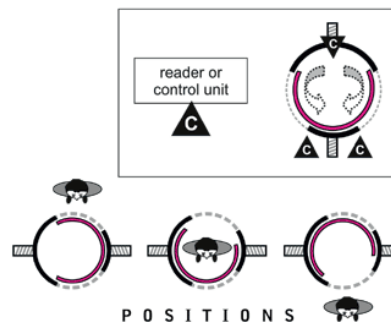


# CYLINDER GATE

## FULL HEIGHT CYLINDER GATE

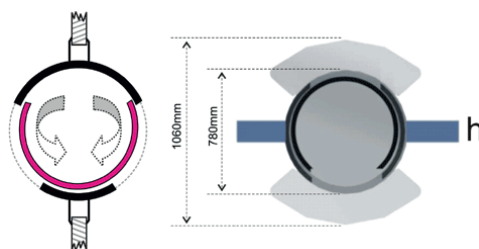

### FEATURES

- Activated input 5-48 v. by dry contact or via TTL.
- Can be controlled via RS 232, RS 485 or LAN network.
- Can be integrated with all kinds of access control units.

### SPECIFICATION

Dimensions: Ø 780 x 2260.  
 Weight: 280kg.  
 Body: (304) Stainless Steel.  
 Power: 220 v. 50 Hz.  
 Temperature: -10°C/+45°C.

Axis Automatic Entrance Systems Ltd, Unit 6, Queens Park Industrial Estate, Studland Road, Northampton, NN2 6NA  
 Telephone: 0844 504 6525 · Fax: 0844 504 6526 · Email: sales@axisautomatic.com · Web: www.axisautomatic.com  
 Service: 0844 504 6535 · Fax: 0844 504 6536 · Sales: 0844 504 6545 · Fax: 0844 504 6546